

# SF350 CARBON MONOXIDE ALARM

## PROCEDURE TO DEACTIVATE UNIT

The SF350 is designed to be a sealed unit with no access to the batteries. However, if you suspect a fault with the unit then the following procedure indicates how to gain access to the battery compartment to check battery connections or deactivate the unit, if necessary.

1. Pull the front flap down on the unit. You will notice the battery compartment cover with the word 'CAUTION' on the front.

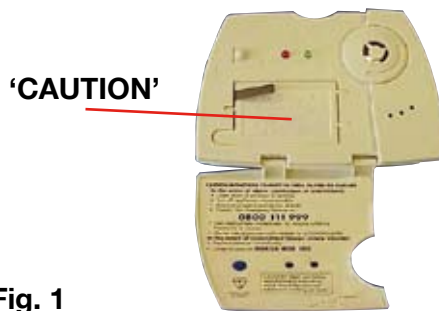


Fig. 1

2. Turn the unit over and you will see a small hole in the bottom right hand corner of the unit.



Fig. 2

3. Insert a very small screwdriver or Allen Key into the hole and through the detector.



Fig. 3

4. This will push off the battery compartment cover.



Fig. 4

5. Once the battery compartment cover has been removed, you will be able to remove the batteries.



Fig. 5

6. **IMPORTANT**

Now that you have deactivated your unit, return to the **“Procedure to deactivate your unit”** page on the website and follow step 6 to obtain a return code for your unit.